





POWERTRON
INDIA PVT LTD

VARIABLE FREQUENCY VFA Series POWER SUPPLY

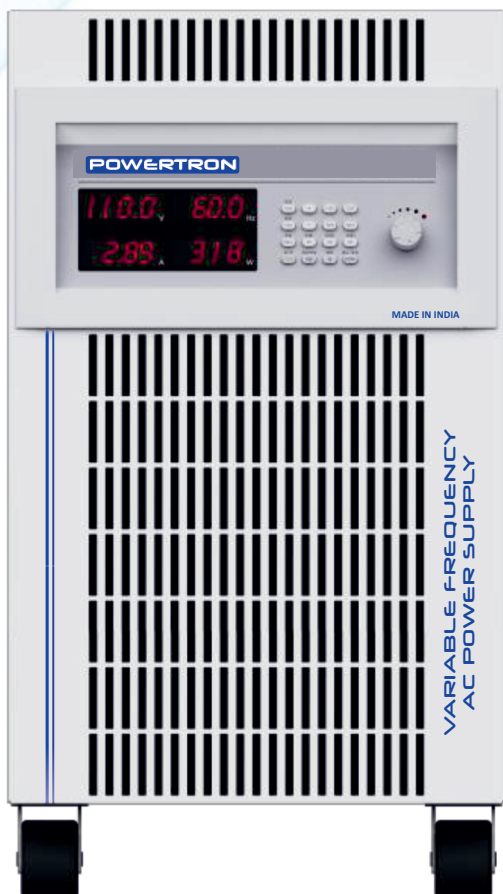

**AUTOMOTIVE
& EV INDUSTRIES**



**AUTOMATION
& MACHINERY**



**AEROSPACE &
DEFENCE**



RAILWAYS



**RENEWABLE
ENERGY SYSTEM**



**ELECTRICAL APPLIANCE
TESTING**

Features

- 7-INCH TRUE COLOR TOUCH SCREEN FOR EASY OPERATION.
- OVERLOAD CAPACITY UP TO 3 TIMES, REDUCING MOTOR LOAD REQUIREMENTS.
- VOLTAGE DISTORTION AS LOW AS 1%, ENSURING HIGH WAVEFORM QUALITY.
- STANDARD PROGRAMMING FUNCTION ENABLES PROGRAMMABLE FREQUENCY CONTROL.
- SOFT START FEATURE PREVENTS EXCESSIVE MOTOR STARTING CURRENT.
- STANDARD RS232 INTERFACE; RS485 AND ETHERNET ARE OPTIONAL.
- AUTOMATIC FAN SPEED CONTROL FOR LOWER NOISE.

Model	Voltage	Current (Low/High)	Power
PIPL-10KVFA-1PH	0-300VAC	90A/45A	10kVA
PIPL-15KVFA-1PH		136A/68A	15kVA
PIPL-20KVFA-1PH		182A/91A	20kVA
PIPL-30KVFA-1PH		272A/136A	30kVA
PIPL-45KVFA-1PH		408A/204A	45kVA
PIPL-60KVFA-1PH		544A/272A	60kVA
PIPL-15KVFA-3PH	Phase voltage 0-300VAC Line voltage 0-520VAC	45A/22.5A	15kVA
PIPL-30KVFA-3PH		90A/45A	30kVA
PIPL-45KVFA-3PH		136A/68A	45kVA
PIPL-60KVFA-3PH		182A/91A	60kVA
PIPL-90KVFA-3PH		272A/136A	90kVA
PIPL-120KVFA-3PH		362A/181A	120kVA
PIPL-150KVFA-3PH		454A/227A	150kVA
PIPL-180KVFA-3PH		545A/272A	180kVA
PIPL-240KVFA-3PH		724A/362A	240kVA
PIPL-300KVFA-3PH		908A/454A	300kVA

WE ALSO PROVIDE CUSTOMIZED SOLUTION

H.O. & Factory : Plot No. A-426 & 427, Road No. 28, Wagle Estate,
MIDC, Ram Nagar, Thane West - 400604, Maharashtra, India

+91 8097707496 / +91 91525 04032

info@powertrondcps.com



powertrondcps.com